




Picture



Features

CE/CB Approved Emergency Light Model DT series
Injection-molded plastic ABS housing
Easy installation and maintenance
Energy-saving LEDs with long operating lifespan of up to 100,000 hours
Over-charged and over-discharged battery protections
Test button to test emergency lighting set in normal operating
LED indicator to monitor battery operating
Lamp angle adjustment: Adjust the head to fit the building structure
Emergency duration: 3 hours
Maximum 48 hours for full recharge t

Dimension (mm)

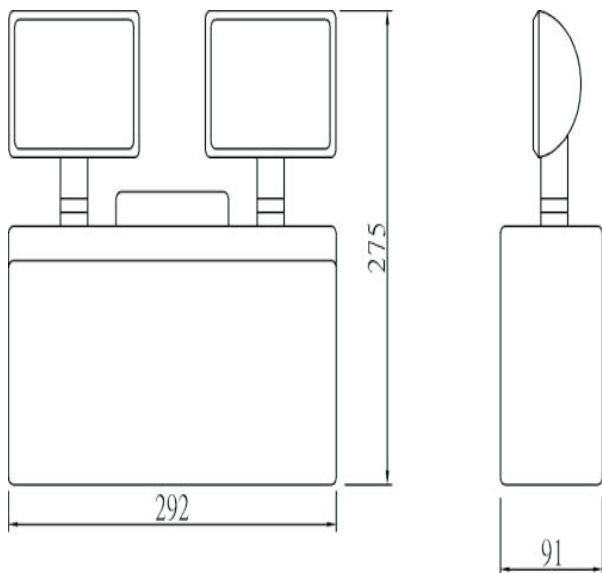

Specifications

Items	Units	Parameter
Input Voltage	V	AC100-240V
Source Type	-	SMD LED 48pcs x 0.2W
Luminous Flux	lm	1200
Brightness	cd/m2	>15
With Charging Indication Meter		Yes
Beam Angle	°	140
Body Materials	-	ABS
Life Time	Hr	50000
Work Temperature	°C	0~50
Emergency Time	Hr	3
Consumption Power	W	4
Battery	-	Lead acid 6V 4AH
Emergency Conversion Time	s	< 1
Charge time	Hr	48
Net Weight/pc (with battery)	g	1600
One Pieces Packing	mm	297x96x280

Packing Information

Packing:	White box				
Carton:	L(cm)		W(cm)		H(cm)
Carton Size:	49		30.7		29.5
Carton CBM:	0.032M3				
Q'TY/INNER BOX:	1PCS				
Q'TY/CTN:	5PCS				
Gross Weight:	8.5KGS				
Net Weight:	9.2KGS				
Container Loading	1*20'		1*40'		1*40' HQ
Q'TY(PCS):					

Product Name	EMERGENCY LED LIGHTS DT Series
Model No.	DT-237A
Main Specification	48x0.2W SMD LED ABS Housing 1200lm (with charging indicator)
Product Size	292x91x275
MOQ	500PCS
Lead Time	35 days
Sample Delivery Time	3~10 days
Remarks:	

