




Picture



Dimension (mm)

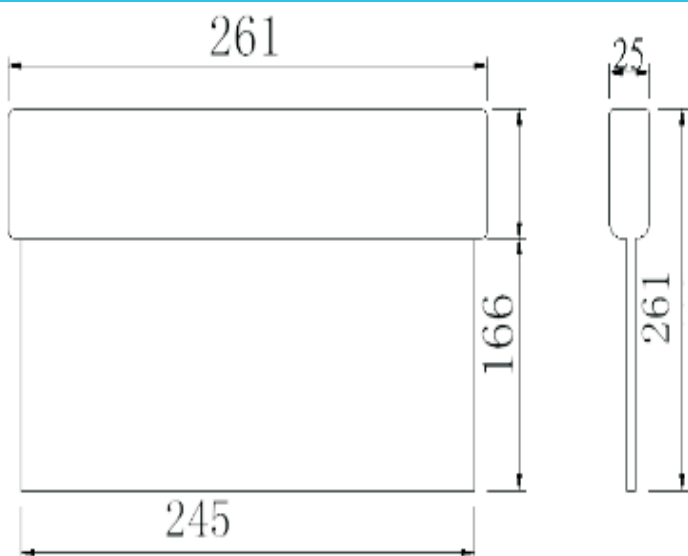

Features

CE/CB Approved EXIT SIGNS Model DL series

Injection-molded plastic ABS housi

Fixing: By Wall Mounting or Ceiling hanging

Single or double face

Energy-saving LEDs with long operating lifespan of up to 100,000 hours

Over-charged and over-discharged battery protections

Test button to test emergency lighting set in normal operating

LED indicator to monitor battery operating

LED color: Red, Green, Blue, Pink, Purple..etc

The words/signs can be made by engraving or by paste printing

White/Green background or Transparency board are available

Various of signage are available

Specifications

Items	Units	Parameter
Input Voltage	V	100-240VAC
Source Type	-	SMD LED 7*0.07W
Luminous Flux	lm	30.8
Display-sided	mm	245x166x3
Display material	-	Acrylic
LED Color	-	White
Beam Angle	°	140
Body Materials	-	Plastic
Life Time	Hr	>20000
Work Temperature	°C	0~50
Emergency Time	Hr	>2
Consumption Power	W	4
Battery	-	Ni-Cd 3.6V 300mAh
Emergency Conversion Time	s	< 1
Charge time	Hr	48
One Pieces Packing	mm	330x201x38
Net Weight/pcs	g	350

Packing Information

Packing:	White box				
Carton:	L(cm)		W(cm)		H(cm)
Carton Size:	48.6		30.6		21.1
Carton CBM:	0.032M3				
Q'TY/INNER BOX:	1PCS				
Q'TY/CTN:	12PCS				
Gross Weight:	4.2KGS				
Net Weight:	4.7KGS				
Container Loading	1*20'		1*40'		1*40' HQ
Q'TY(PCS):					

Product Name	EMERGENCY LED SIGNS DL Series
Model No.	DL-196
Main Specification	7x0.07W SMD LED ABS Housing
Product Size	261x261x25
MOQ	500PCS
Lead Time	35 days
Sample Delivery Time	3~10 days
Remarks:	

